


Installing Jumpers for the DSG2001

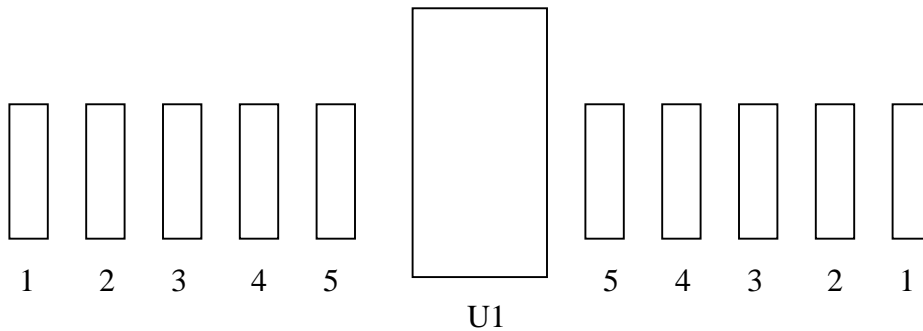

Install Jumper #4 for any level of pre-emphasis. If no pre-emphasis is required do not install a jumper on #4. A jumper will be required for #4 on the left side as well as the right side of U1.

Install Jumpers at #1 & #4 for 75us Pre-emphasis

Install Jumpers at #2 & #4 for 50us Pre-emphasis

Install Jumpers at #3 & #4 for 25us Pre-emphasis

Install at Jumper only at #5 for maximum input gain and no pre-emphasis.

If maximum gain is not needed and pre-emphasis is not needed then jumper only #1 and leave all the other jumpers off.

The jumpers on the left of U1 and on the right should be the same (i.e. if jumpers are on #1 and #4 on the right of U1 then jumper should be on #1 and #4 on the left side of U1).